

Commercial Air Conditioning Product Pages



MHI-SRK Wall mounted



Mitsubishi Heavy Industries's **SRK range** of wall-mounted split systems is now available in capacities up to 10kW, making them ideal for all commercial & retail spaces. With the latest R32 refrigerant and inverter technology, this versatile wall-mounted range includes an infra-red controller and can also utilise wifi controls if required.

R32
technology

Key Features & Benefits:



- Auto restart and auto flap mode functionality
- Available with wireless remote as standard
- Quiet Ari Flow & Long Reach is achieved by jet technology.
- Allergen clear operation cleans air, using a control scheme owned only by Mitsubishi Heavy Industries Thermal Systems.
- Smaller models of the SRK range ZSX series come in three different colours



MAC ACCREDITATION:



MHI – FDT Standard ceiling cassette

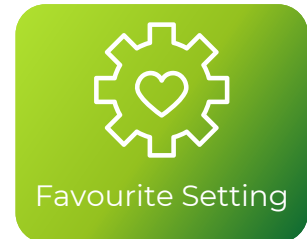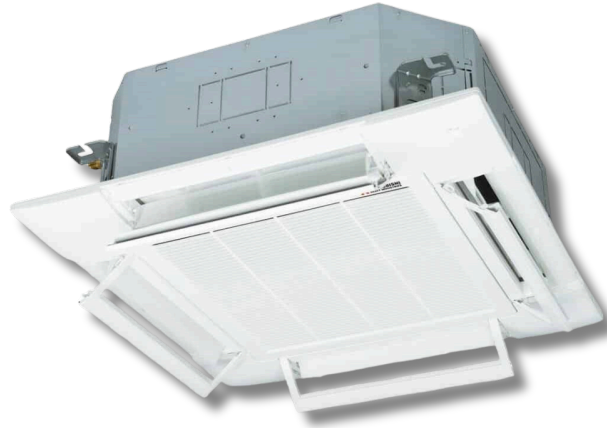

Mitsubishi Heavy Industries's **FDT range** ceiling cassette with a slimline design features flap control on each of the 4 outlet louvers which can be programmed for optimised heating/cooling control and efficiency.

R32
technology

Key Features & Benefits:


- Individual Louvre Control
- Extended pipe runs of up to 100m
- New slim design optimised for small ceiling voids
- Available with hard-wired control as standard



MAC ACCREDITATION:



MHI – FDE Ceiling suspended

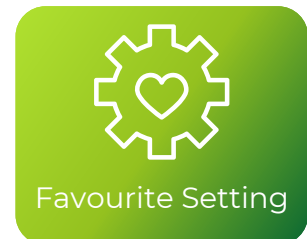

Mitsubishi Heavy Industries's **FDE range** is ceiling suspended with Optimal for sites without a false ceiling or void, these units provide installation flexibility, with multiple options for refrigerant pipe run positioning.

R32
technology



Key Features & Benefits:

- Extended pipe runs of up to 100m
- Top, right or rear piping is available, for added installation flexibility
- Slim height design of 210mm or 250mm
- Available with hard-wired control as standard



MAC ACCREDITATION:




**MITSUBISHI
HEAVY INDUSTRIES**

AIR CONDITIONING
& WATER HEATING

3 DIAMOND DEALER

MHI - FDUM Ducted

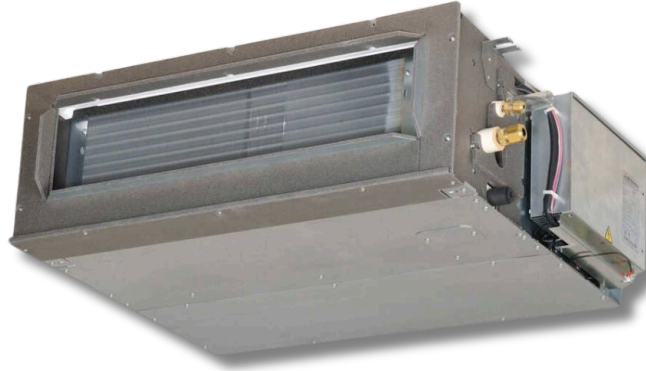

Mitsubishi Heavy Industries's **FDUM range** is Efficient and compact, the indoor unit on this ducted range are less than 30cm tall and ideal for concealed cooling with low-volume operation.

R32
technology

Key Features & Benefits:

- External static pressure control function
- Extended pipe runs of up to 100m
- Pre-fit lift pump
- Available with hard wired control as standard



MAC ACCREDITATION:

